

DH-CS4010-8ET2GT-110

10-Port Cloud Managed Desktop Switch with 8-Port PoE



- 8 x RJ-45 10/100 Mbps PoE ports, 2 x RJ-45 Gigabit ports.
- 110 W total PoE budget, 802.3af/at on all PoE ports, additional 802.3 bt on red ports.
- DIP switch to fast turn on/off working mode of Cloud-Managed, PoE Watchdog, Long Distance PoE.
- Wide operating temperature ranging from -10 °C to 55 °C.
- Supports VLAN and loop protection.
- WEB-managed and centralized cloud management through the DoLynk App and performs real-time monitoring of the network.
- Easy config to auto detect and set up network and security systems.



System Overview

Highly intuitive, the Cloud Managed Switch can manage local networks. With the DoLynk Care platform, it can also perform cloud management. The switch performs operation and maintenance using topology visualization on front-end, transmission and back-end storage devices that are in the security system and IT system. With its full metal design, the switch has great heat dissipation and can operate in temperatures ranging -10°C to 55°C (+14°F to +131°F). It offers EMC and has protection against overvoltage, overcurrent, static electricity, lightning strikes, pulses and other types of interference. For the PoE series Smart Managed Switch, power is supplied up to 250 meters away. The orange port supplies up to 60 W and the red port provides up to 90 W. The switch can be used in small and medium-sized businesses such as supermarkets, offices, restaurants, cafés and hotels.

Functions

Managed Mode ON/OFF

Easily switches between managed and unmanaged mode with just the flip of a switch. When in managed mode, you can perform management through the webpage locally or the cloud platform. This allows the device to seamlessly adapt to a variety of scenes.

Cloud Management

Devices can be managed through the DoLynk Care app and performs real-time monitoring of the network. The app also displays the status of devices, triggers alarms for errors in real time and sends notifications.

Network Topology Management

Supports the LLDP protocol and is able to generate and display the network topology, so that you can quickly identify issues, and perform operation and maintenance remotely on devices that are in the topology.

BT 90W (Red Port)

The red ports support IEEE802.3af, IEEE802.3at, IEEE802.3bt and Hi-PoE standards, with a maximum output power consumption of 90W per port. Suitable for powering high-power devices.

Long Distance PoE

The transmission distance of a PoE port can be up to 250 m, meeting the requirement of wired transmission (bandwidth reduced to 10 Mbps).

PoE Watchdog

Adopts the innovative PoE Watchdog. It enables the switch to automatically detect port status and restart the failed ports to recover connection in case of IPC connection exception. This enables intelligent operation and maintenance management in its true sense and effectively reduces manual maintenance costs.

Loop Protection

When a loop is detected, the loop alarm will be triggered and the elimination mechanism will activate to prevent broadcast storms from occurring.

Scene

Suitable for scenes such as factories and office buildings.

Cloud Managed Switch | DH-CS4010-8ET2GT-110

Specification		Performance	
Basic			
Layer	Layer 2	MTBF	3,359,638 hours
Switching Capacity	5.6 Gbps	Packet Buffer Size	4 Mbit
Packet Forwarding Rate	4.17 Mpps	Jumbo Frame	9216 Byte
Description of Function Slots	Port 1-8: 8 × RJ-45 10/100 Mbps (PoE) Port 9-10: 2 × RJ-45 10/100/1000 Mbps (uplink)	MAC Table Size	8K
Operating Temperature	-10 °C to +55 °C (+14 °F to +131 °F)	Communication Standard	IEEE 802.3; IEEE 802.3u; IEEE 802.3x; IEEE 802.3ab; IEEE 802.3az
Operating Humidity	10%–90% (RH), non-condensing	VLAN Number	32
Storage Temperature	-40 °C to +70 °C (-40 °F to +158 °F)	Feature	
Storage Humidity	5%–95% (RH), non-condensing	VLAN Function	IEEE 802.1Q VLAN
Power Supply	External Power Adapter (54 V, 2.22 A)	Port Feature	IEEE 802.3x Flow Control Unknown Unicast Suppression Multicast Storm Control Broadcast Storm Control MAC+Port Binding Loop Prevention
Power Consumption	Idling: 5.7 W Full load: 115 W	Mirror	Local Port Mirroring N:1 Mirroring
Statics Protection	Air discharge: 8 kV Contact discharge: 6 kV	Reliability	LLDP
Lightning Protection	Common mode: 6 kV Differential mode: 1 kV	DHCP Function	DHCP Client
Net Weight	0.36 kg (0.79 lb)	Security	Port Isolation
Gross Weight	1.09 kg (2.03 lb)	Equipment Management	Web Management Cloud Management Logs Fault Alarm
Product Dimensions	184.6 mm × 103.3 mm × 27 mm (7.27" × 4.07" × 1.06") (L × W × H)	General	
Packaging Dimensions	252 mm × 137 mm × 113 mm (9.92" × 5.39" × 4.45") (L × W × H)	Packing List	1 × User Manual 1 × Legal and Regulatory Information 1 × Power Cord 1 × Power Adapter
Casing Material	Sheet metal		
Installation	Desktop mount; wall mount		
Certifications	CE		
PoE			
PoE	Yes		
PoE Power	Port 3-8≤30 W, port 1-2≤90 W, total≤110 W		
PoE Protocol	IEEE 802.3af; IEEE 802.3at; Hi-PoE; IEEE 802.3bt		
PoE Power Consumption Management	PoE power consumption management; PoE power on/off; turns off PoE if overload is detected		
PoE Pin Assignment	Port 1-2: 1,2,4,5 (V+),3,6,7,8 (V-) Port 3-8: 1,2, (V+),3,6, (V-)		
Long Distance PoE Transmission	Yes		
Hardware			
DIP Switch	Managed Mode: On by default for both local web and cloud management. Off for Unmanaged Mode. PoE Watchdog: Monitors ports 1-8 and auto-restarts the PoE port when there is no traffic for 2 min. (Only works when Managed Mode is Off) Extend Mode: Ports 1-8; transmission distance up to 250 meters at 10 Mbps. (Only works when Managed Mode is Off)		
Reset Button	1		

Cloud Managed Switch | DH-CS4010-8ET2GT-110

Transmission Performance:

Switch power supply voltage 54V.
CAT6. Max. DC resistance < 8 Ω/100 m

Cable(m)	Load Capacity(W)
IEEE802.3bt 90 W	
100	71.3
150	62
200	51
250	40

Hi-PoE 60 W


100	46
150	42
200	37
250	32

IEEE802.3at 30 W


100	25.5
150	25.5
200	25.5
250	24

Note: Data from this table was collected by Dahua test lab and is for reference only.
The actual transmission distance may vary due to power consumption of connected devices or the cable type and status.

Installation

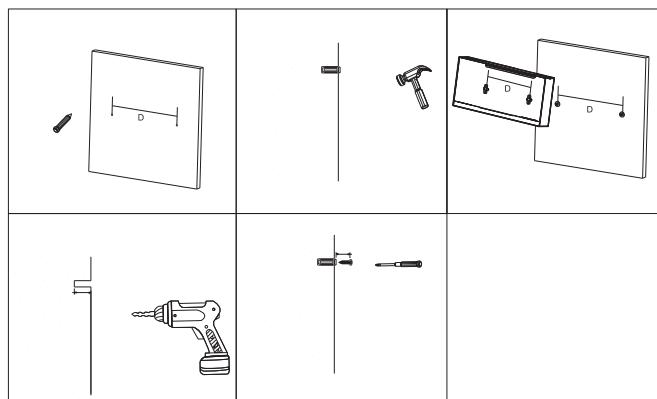

Dimensions (mm[inch])

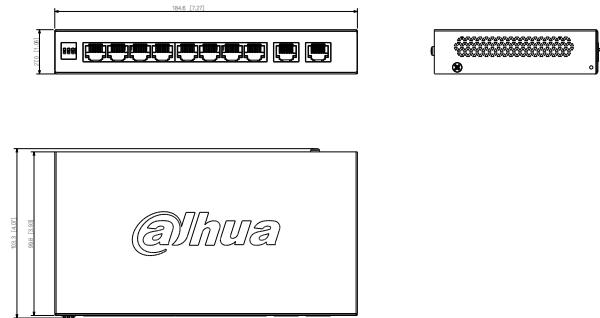

Panels

